




## Accessories Rolamentos do Brasil Ltda.

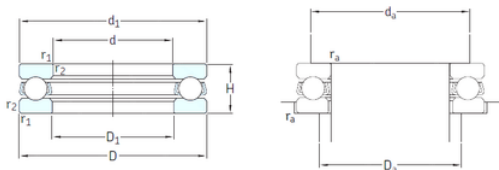

### SKF 51208 Thrust Ball Bearing 51204, 51205, 51206, 51207

Bearing No. 51208

51208 Bearing 2D drawings and 3D CAD models

Size	40x68x19 mm
Bore Diameter	40 mm
Outer Diameter	68 mm
Width	19 mm
d	40 mm
D	68 mm
H	19 mm
d1	68 mm
r1 min.	1 mm
r2 min.	1 mm
D1	42 mm
da min.	57 mm
Da max.	51 mm
ra max.	1 mm
Weight	0,28 Kg
Basic dynamic load rating (C)	44,2 kN
Basic static load rating (C0)	96,5 kN
Fatigue load limit (Pu)	3,6
Reference speed	3800 r/min
Limiting speed	5300 r/min
Category	Thrust Ball Bearing
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.28



## Accessories Rolamentos do Brasil Ltda.

EAN	7316577057983
Product Group	B00308
Rolling Element	Ball Bearing
Thrust Bearing	Yes
Single or Double Direction	Single Direction
Banded	No
Cage Material	Steel
Precision Class	ABEC 1   ISO P0
Component Description	Roller Assembly Plus Raceways
Other Features	Single Row
Long Description	40MM Bore 1; 42MM Bore 2; 68MM Outside Diameter; 19MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; ABEC 1   ISO P0 Precision
Inch - Metric	Metric
Category	Thrust Ball Bearings
UNSPSC	31171507
Harmonized Tariff Code	8482.10.50.08
Noun	Bearing
Keyword String	Ball Thrust
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	51208
Weight / LBS	0.616
Bore 2	1.654 Inch   42 Millimeter
Overall Height with Aligning Washer	0 Inch   0 Millimeter
Bore 1	1.575 Inch   40 Millimeter
Height	0.748 Inch   19 Millimeter
Outside Diameter	2.677 Inch   68 Millimeter
bore diameter:	40 mm
static load capacity:	96.5 kN



## Accessories Rolamentos do Brasil Ltda.

outside diameter:	68 mm
dynamic load capacity:	44.2 kN
overall width:	19 mm
maximum rpm:	5300 RPM
thrust bearing type:	Single-Direction
cage material:	Steel
outside diameter design:	Straight
fillet radius:	1 mm
separable or banded:	Separable
series:	512
precision rating:	ABEC 1 (ISO Class Normal)
$d_1$	68 mm
$D_1$	42 mm
$r_{1,2}$ min.	1 mm
$d_a$ min.	57 mm
$D_a$ max.	51 mm
$r_a$ max.	1 mm
Basic dynamic load rating C	44.2 kN
Basic static load rating $C_0$	96.5 kN
Fatigue load limit $P_u$	3.6 kN
Minimum load factor A	0.058
Mass bearing (including seat washer where applicable)	0.28 kg